


BATTERY CHARGER (Model: R11AH)

With this external battery charger, you can charge the approved batteries directly without plugging it into the notebook.

About the Battery Charger

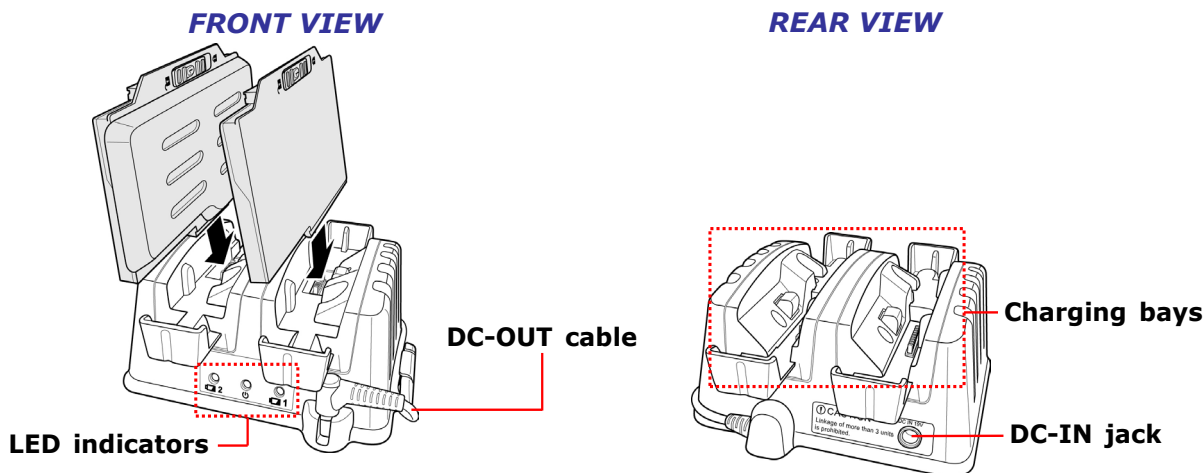

- **DIMENSIONS:** 151.96mm x 165.30mm x 70.00mm
- **WEIGHT:** 546g

LED Indicators

Icon	Item	LED Color and Status	
	Battery indicator	Green	Charging complete
		Orange	Battery charging
		Red	Charging error
		Off	No battery is inserted
❖ The Green LED lights up when the battery is at 95% charged. For 100% fully charged pack, user will need to leave the pack to be charged for longer.			
	Power indicator	Green	19V DC power is supplied
		Off	No power supply

Using the Battery Charger


1. Connect the charger unit to an electrical outlet using the power adapter.
2. Insert battery into the designated charging bay.

Charger has two charging bays and can support chain connection to another charger using the attached DC-OUT cable, for at most up to total of 3 chargers.

When chargers are connected, the charging starts from the last charger of the chain. (The charging sequence is shown in the right figure: 1-1, 1-2, 2-1, 2-2, 3-1, 3-2)

Normal charging time will vary by the capacity of the battery pack.

- To fully charge 2 battery packs on a single charger will need around 2.5 hours.
- To fully charge 4 battery packs on 2 chain-connected chargers will need around 5 hours.
- To fully charge 6 battery packs on 3 chain-connected chargers will need around 7.5 hours.

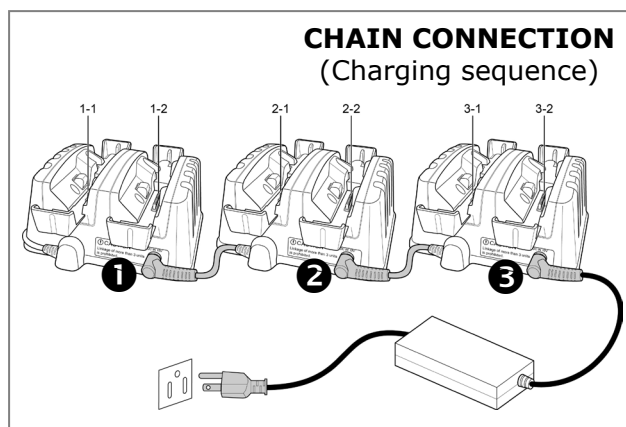

NOTE

- Use only the designated power adapter (19V/65W) to avoid damage to the charger.
- Charging time may vary depending on the remaining battery capacity.

62+009662+00